

AE-04 Series

- 4 Digital Inputs
- 6 Analog Inputs
- 2 Transistor outputs
- RS-485 communication
- Built in OLED Display
- micro SD card support
- DS3231 RTC with battery backup



CE EN 61131-2:2007
EN 61010-1:2010+A1:2019
EN IEC 61010-2-201:2018

2014/30/EU- Electromagnetic Compatibility (EMC)
Annex III, Part B, Module C



Display options

- 0.96 OLED Display
- 0.96 TFT Color Display
- 1.44 TFT Color Display

Expansions supported

LoRa communications
REYAX RYLR896



NB-IOT
BC95 module



Temperature
MAX31856



Analog
4-20mA / 0 - 10V



Load cell
HX-711



Main

Range of product	NORVI IIOT	
Product type	Programmable Controller	
Certifications	EN 61131-2:2007 EN 61010-1:2010+A1:2019 EN IEC 61010-2-201:2018	2014/30/EU- Electromagnetic Compatibility (EMC) Annex III, Part B, Module C
Rated supply voltage	24V DC	
Discrete input number	4 discrete input	
Discrete output type	Transistor	
Discrete output number	2 Transistor outputs	
Discrete output voltage	24V DC for transistor output	
Discrete output current	0.5A with T0.0... T0.1 Transistor 2 A with R0....R5	
Communication	1 x RS-485	
OLED Display protocol	I2C	
TFT Display protocol	SPI	
Analog input range	4 - 20mA (AE04-I) / 0 - 10V (AE04-V)	
Analog input resolution	16 bit	


Complementary

Discrete IO number	6
Number of Expansions	-----
Supply voltage limits	20.4....28.8V
Inrush current	<=50A
Power consumption in W	32.6.....40.4 with all outputs ON
Discrete logic input	Sink or source
Discrete input voltage	24V
Discrete input voltage type	DC
Voltage state 1 guaranteed	>=15 V for input
Voltage state 0 guaranteed	<=5 V for input
Discrete input current	5 mA for input
Input impedance	4.7k Ohm for input
Memory capacity	Refer datasheet of base micro-controller
Battery type	-----
Backup time	-----
Local signalling	1 LED green for PWR 1 LED green for RUN 8 LED green for I0.....I7 6 LED green for R0.....R5 2 LED green for T0....T1
Electrical connection	Removable screw terminal block for inputs and outputs (pitch 5.08 mm)
Mounting support	Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 rail conforming to IEC 60715 Plate or panel with fixing kit
Height	90.50 mm
Depth	56.60 mm
Width	60.60 mm
Product weight	0.43 Kg



Environment

Resistance to electrostatic discharge	4kV on contact 8kV on air
Resistance to electro magnetic fields	10 V/m (80 MHz 1GHz) 3 V/m (1.4 MHz 2 GHz) 1 V/m (2 MHz 3 GHz)
Immunity to microbreaks	10 ms
Relative humidity	10....95% without condensation in operation
IP degree of protection	IP20
Operating Temperature	-10 ... +85° C (14...185 °F)
Storage Temperature	-25 ... +85° C (-13...185 ° F)
Operating altitude	0...2000m
Storage altitude	0...3000m
Shock resistance	15 gn for 11 ms

Digital inputs wiring diagram

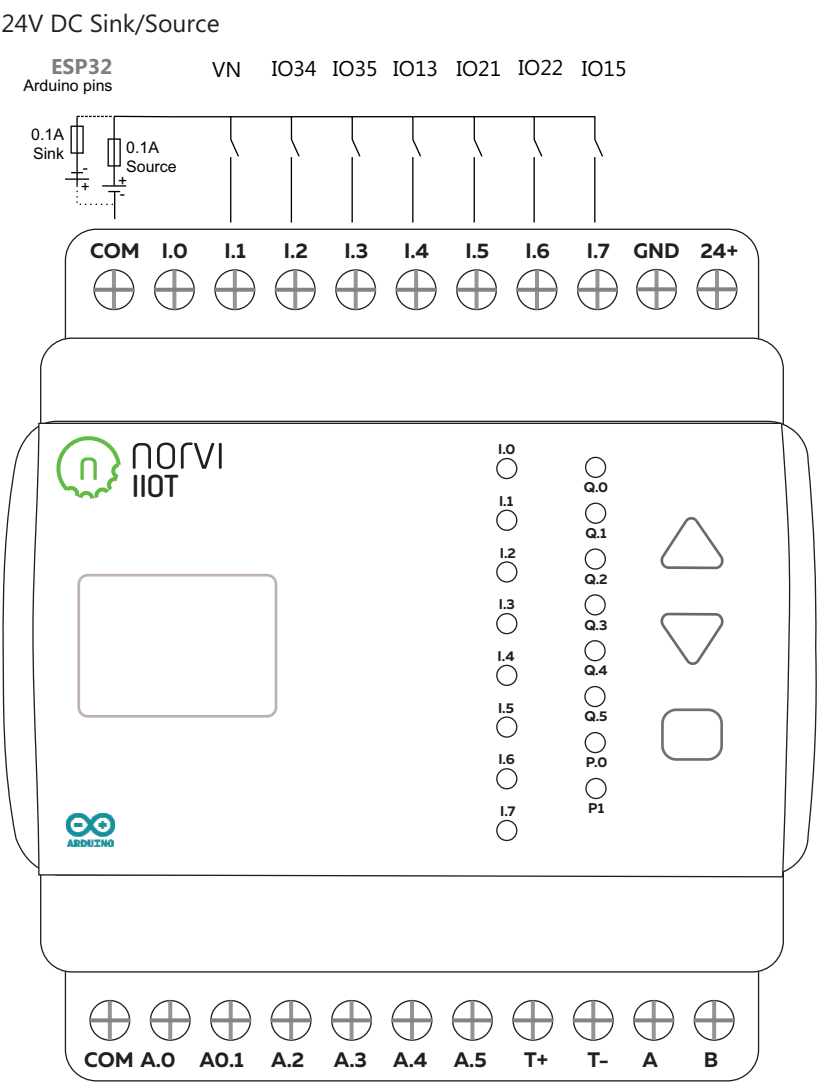



Transistor outputs wiring diagram

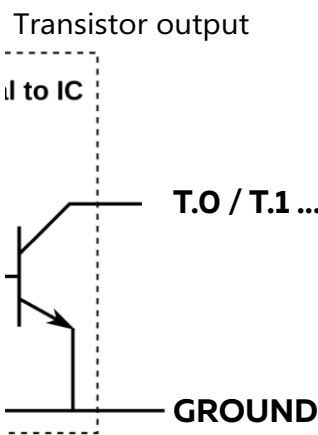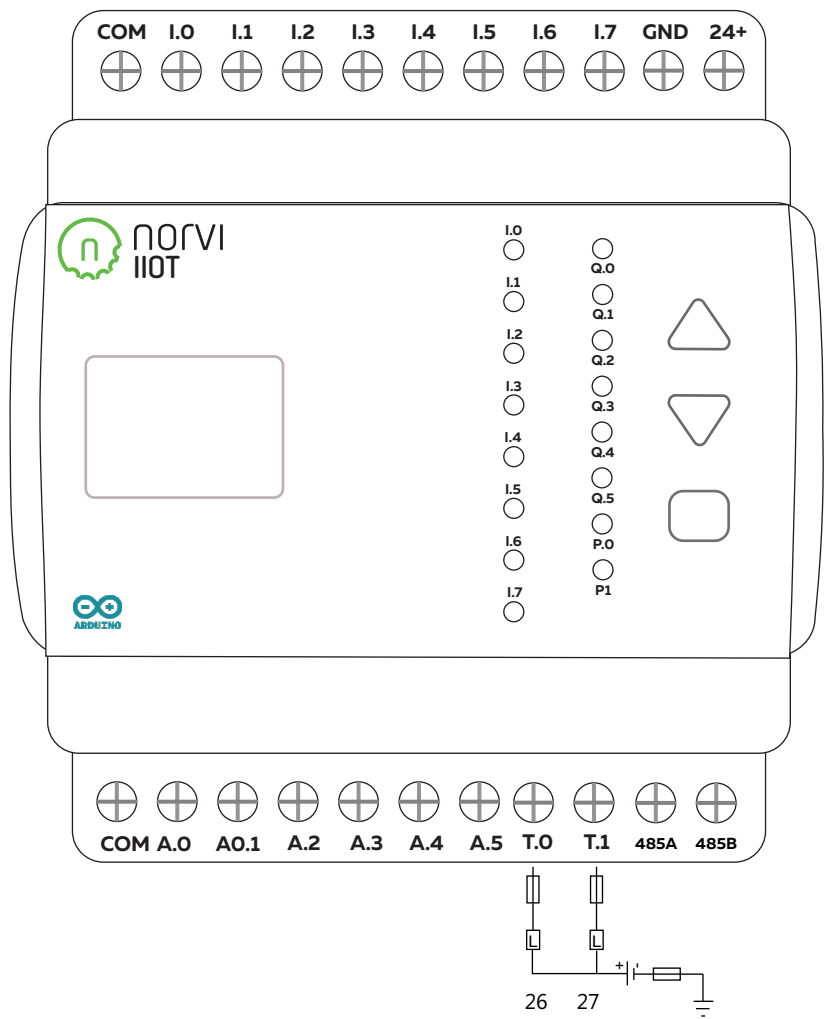

RS-485 communication wiring diagram


Driver	MAX485	
UART Connection	IO2 - RXD	IO33 - TXD
Flow Control	IO4	

Hardware UART library file should be edited to work with UART connections

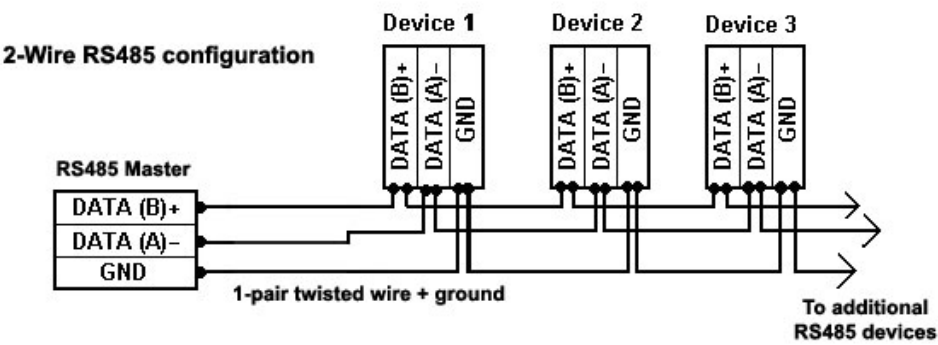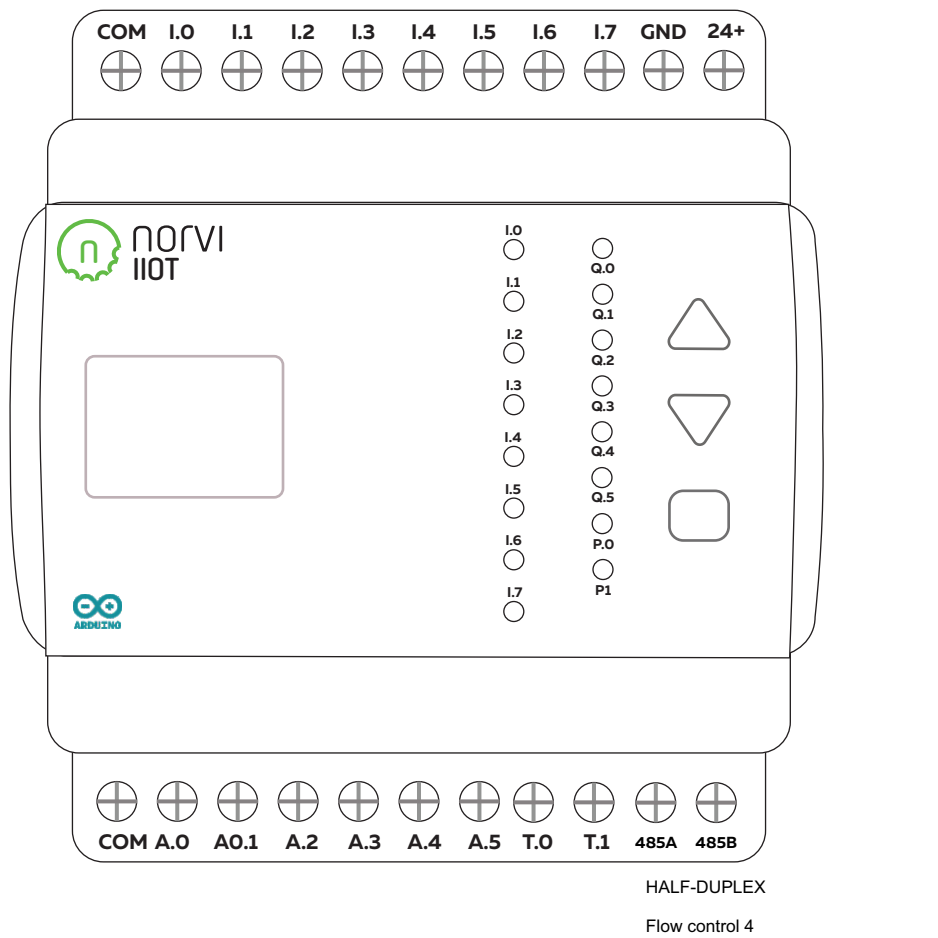

Analog input wiring diagram (4-20mA)


*AE-02 / AE-03 Models Only

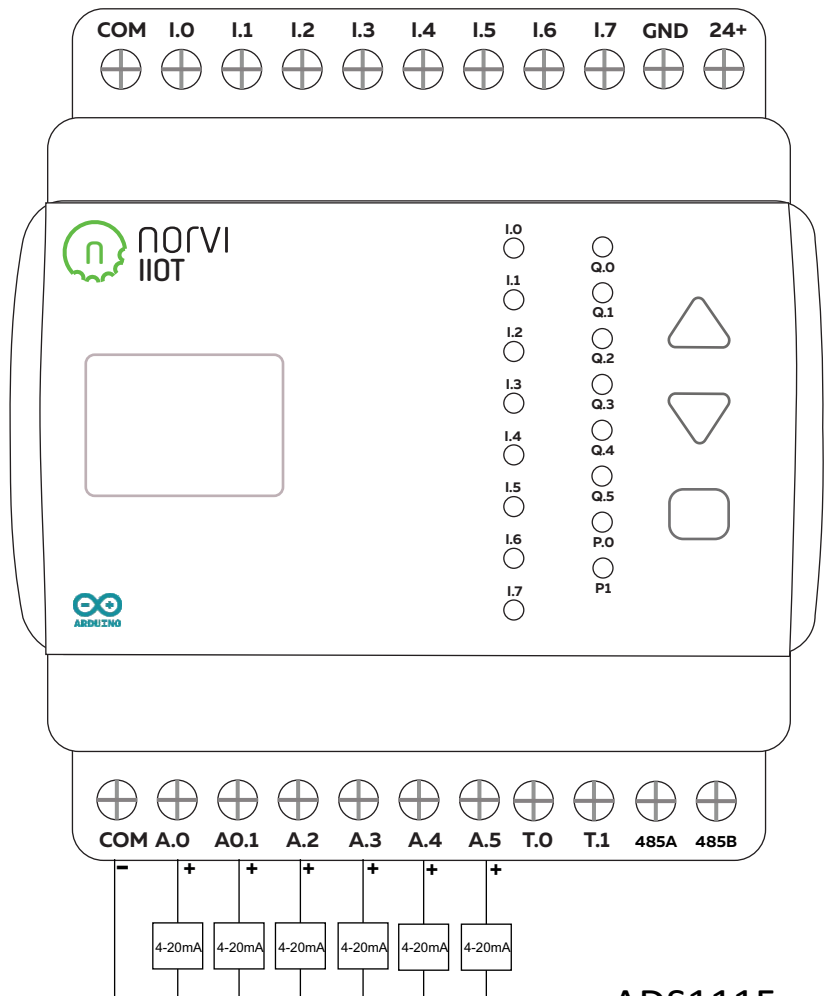

ADS1115 connections

IC Type	ADS 1115
Communication	I2C IO16 - IO17
Module Address	0x48 / 0x49
Resolution	16 bit

0 - 20mA to 0 to 4V

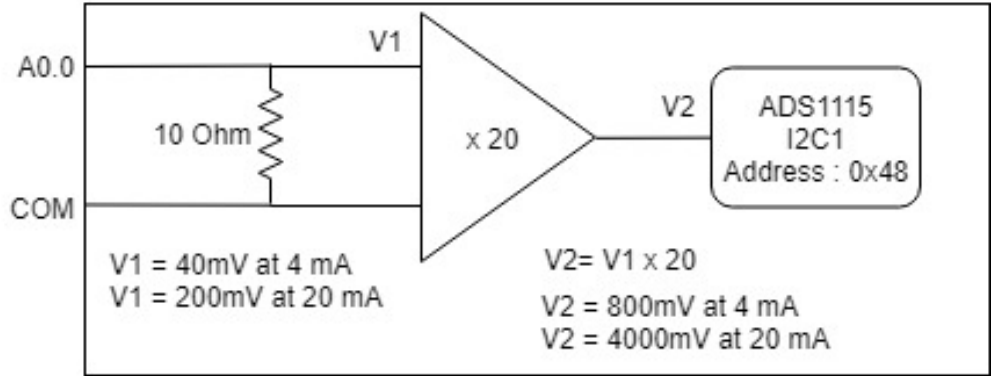

TFT Display parameters

Display driver	ST7789
Communication	SPI IO18/IO19/IO23 SCK/MISO/MOSI
Module Address	NA
Resolution	80 x 160
Connection	TFT_SCK IO18 TFT_RST IO32 TFT_MOSI IO23 TFT_DC IO13 TFT_CS IO27

0.96 OLED Display parameters

Display driver	SSD1306
Communication	I2C IO16(SDA) - IO17(SCL)
Module Address	0x3C
Resolution	128 x 64

RTC parameters

Display driver	DS3231
Communication	I2C IO16(SDA) - IO17(SCL)
Module Address	0x68
Battery Backup	YES



microSD card access

Connection	SCK IO18 CS IO5 MISO IO19 SD Detect IO14 MOSI IO23
------------	--


Built in buttons

Read mode	ADC (Analog to Digital Conversion)
Analog IO	GPIO 32


Voltage levels 3

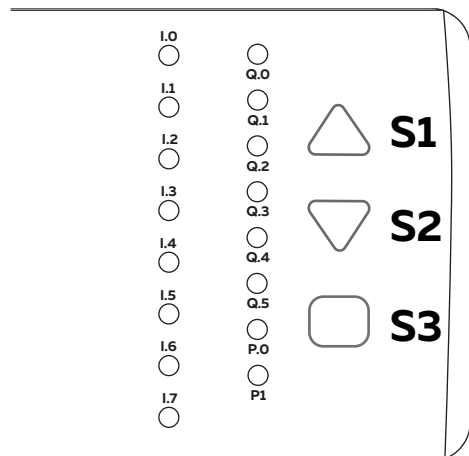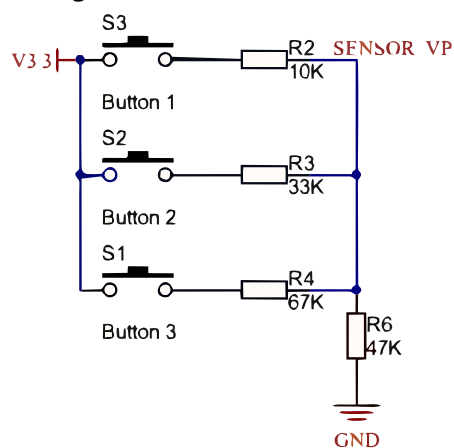

Expansion port

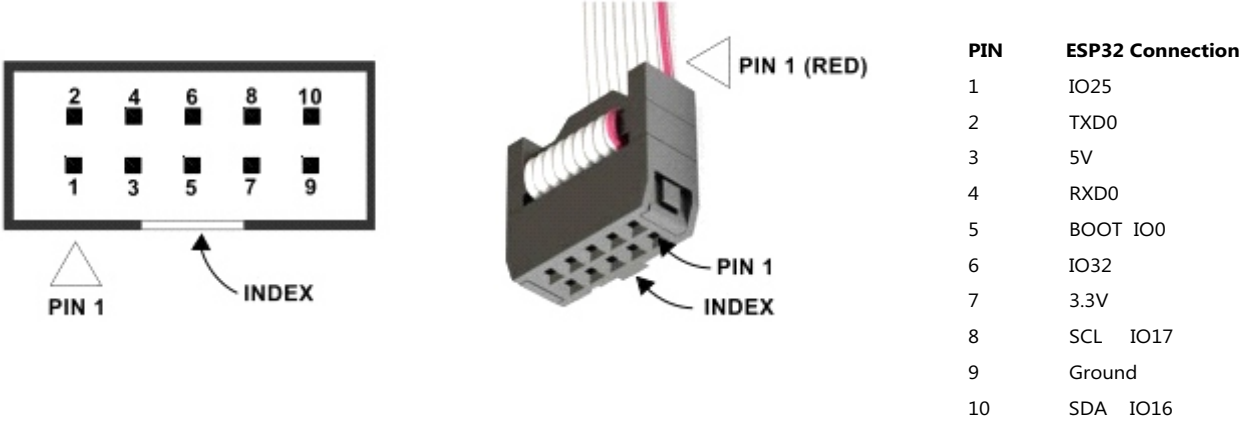


Expansion modules

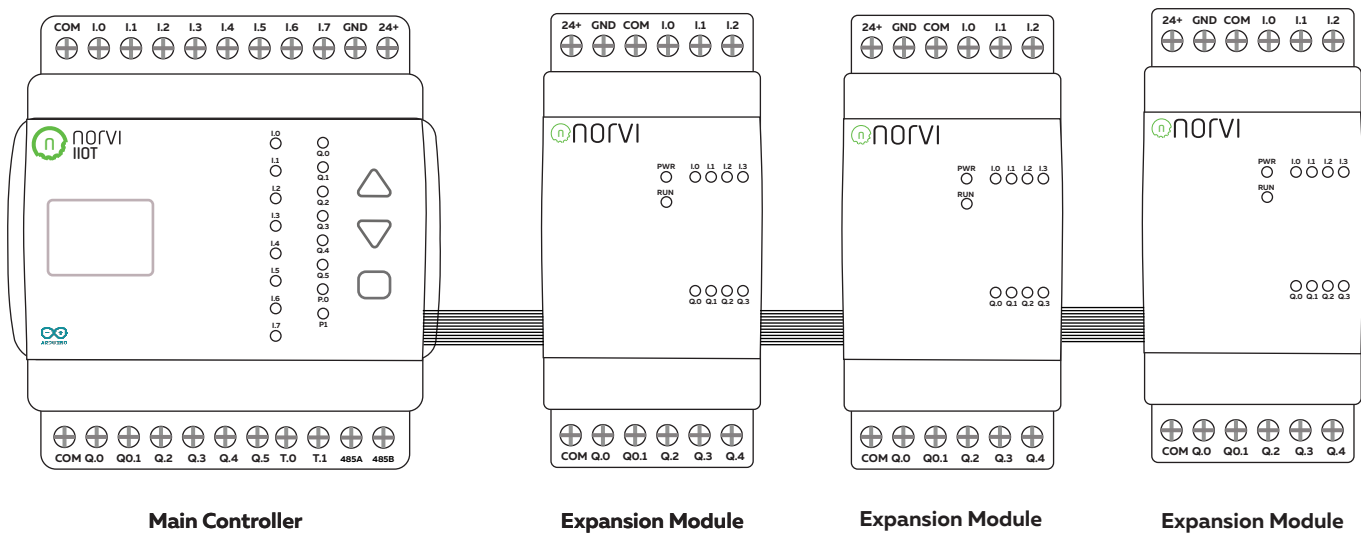

- Expansion modules connects to the right side of the controller
- Upto 6 expansion modules can be connected on one controller
- Expansion modules use I2C, UART and GPIO on the expansion port
- Depending on the model, some expansion modules require external power




Programming procedure

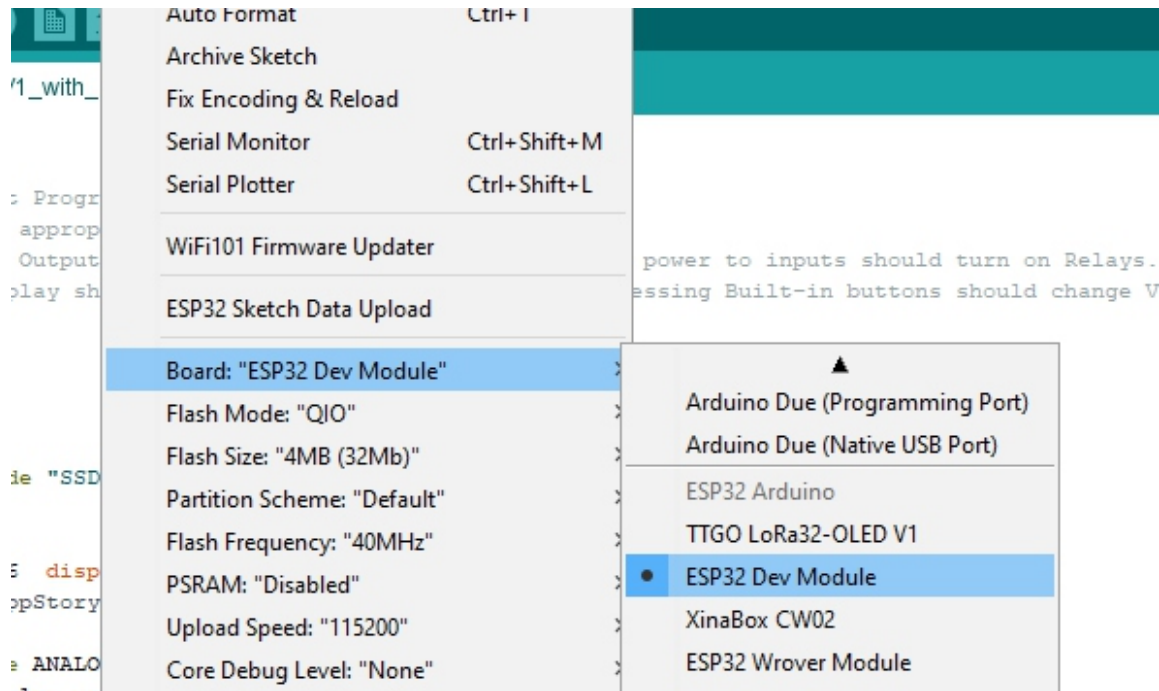

Board	ESP32 Dev Module
Flash Mode	QIO
Flash Size	4MB
Flash Frequency	10MHz
PSRAM	Disabled
Upload Speed	115200

After successful uploading of program following message appears.

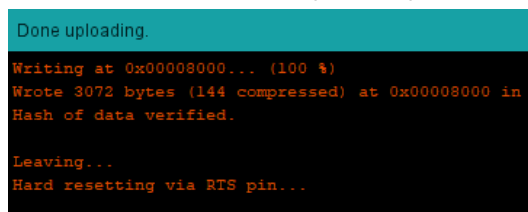


esp32 Boards must be installed under board manager, it is recommended to use the latest version of esp32 board driver for Arduino.

Due to installation of different drivers and older versions of libraries, Arduino fails to upload the program to the controller. In most cases it is due to failure to enter boot mode of the device.

The device can be forced to boot mode by connecting the BOOT IO0 of the expansion port to the GND pin with a jumper wire. Arduino is able to upload the program to controller while the controller is in boot mode.

After uploading the program , the connection between the BOOT IO0 and GND must be removed to run the uploaded program.

Dimensions

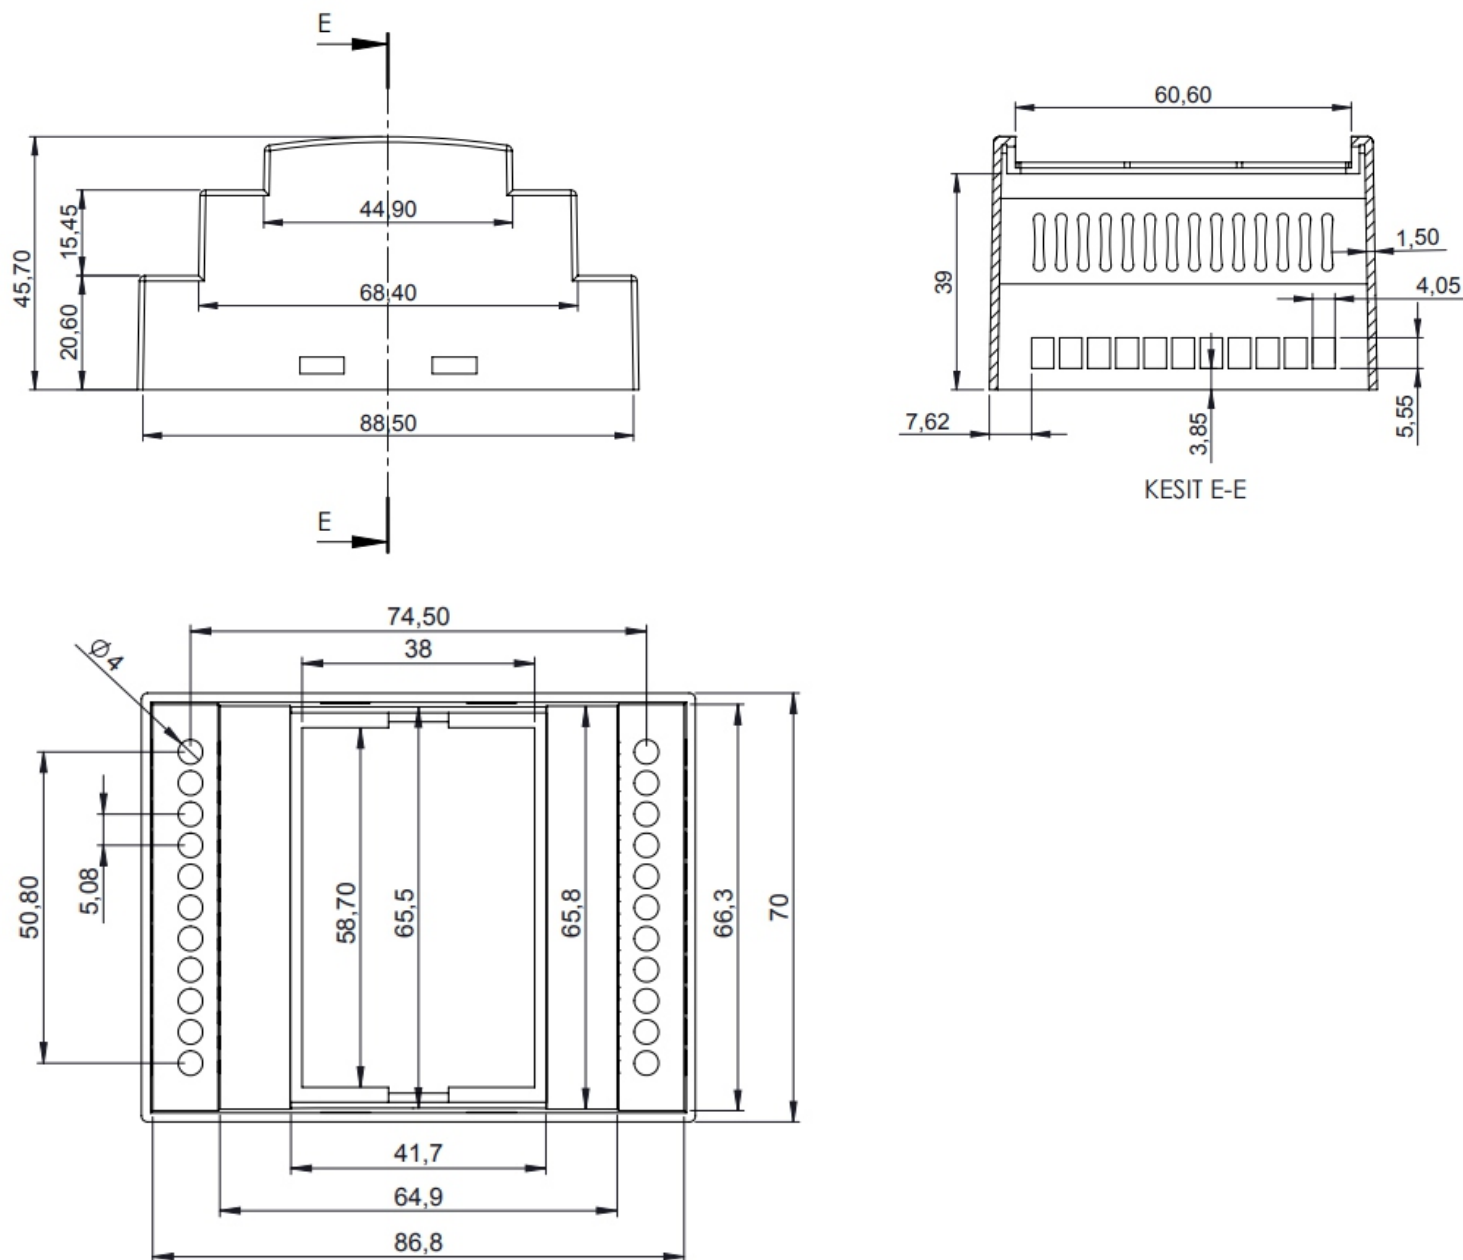



Reach-Us

Technical Support

E-mail : info@icd.lk

Forum : <https://norvi.lk/forums/>

Sales Inquiries

E-mail : bhanuka@icd.lk

Web : <https://norvi.lk/support/>

Order Online

<https://norvi.lk/>