


NORVI CEMA

Arduino Genuino micro

Quick Guide

Connections and Programming

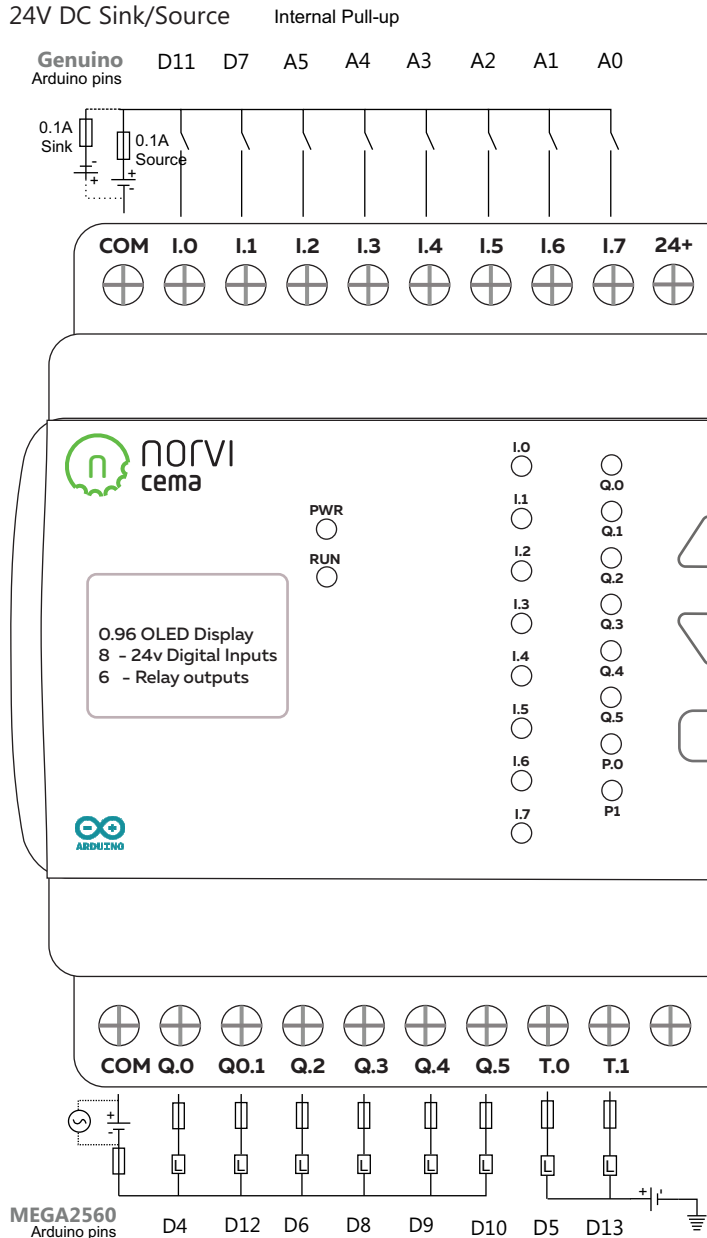

Supply Voltage 24V DC
Relay Max. current 5A max
Transistor Max. current 500mA
Digital input voltage 24V Sink/Source

Micro-controller
Chip ATMEGA32-U4
Clock 16 Mhz
Bootloader Arduino Genuino

OLED Display 0.96'
Interface I2C 0x3C (Address)
Controller SSD1306

